

B3-V Peristaltic Dosing Pumps

Overview

The B series are a range of peristaltic pumps fixed and variable flow rates designed for discontinuous use. Both the B Series and BH Series are perfect for smaller dosing systems that require small amounts of chemical addition in short periods of time.




B3-V Dosing Pump

Technical Features

- **Flow Rate** Up to 12 L/H
- **Maximum Pressure** 3 Bar
- **Power Supply** 90 – 260 V standard; available with optional removable power cable
- **Tubing** Available in Santoprene, Silocone, Norprene or tygon
- **Flow Rate Adjustment** 10 – 100%
- **Level Control** Optional (level probe not supplied)

Dimensions (in mm)

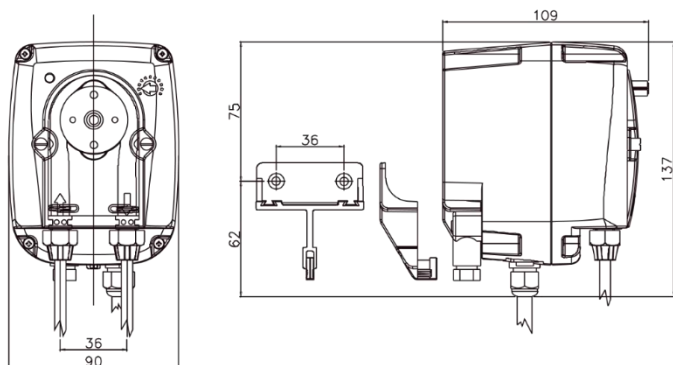

B3-V Peristaltic Dosing Pumps

Accessory Kits

Suitable for most water treatment applications; Include:

Standard Kit

- PVC/FPM injection Valve
- PP/FPM Foot Filter
- 2m each of PVC suction & LDPE discharge tubing

Includes:

“Brightener” Kit

- Nickel plated brass/FPM injection valves
- SS foot filter
- 2m each of PVC suction LDPE discharge tubing

Suitable for use with detergents; include:

Detergent Kit

- PP/EPDM injection valve with 90 ___ hose nipple
- SS foot filter
- 2m each of PVC suction LDPE discharge tubing

Models

0103

0403

1201